

Datasheet

Circularly Polarized Active GPS Ceramic Antenna

Model:	AIGC020	AIGC021
PN:	M04-0103720ROA	M04-0103740ROA
Cable Length:	150 mm	100 mm

Description:

Active B1/L1/G1 Band BDS/GPS/GLONASS Antenna
Operating Frequency: 1550-1605 MHz

Features:

Ceramic Patch Element
Cable: 100/150 mm RF 1.13
Connector: IPEX 1
Dimensions: 18 x 18 x 4 mm
RoHS & Reach Compliant





Table of Contents

FEATURES & BENEFITS	1
APPLICATIONS.....	1
ORDER INFORMATION.....	1
MECHANICAL DIMENSIONS.....	2
REFERENCE GUIDE.....	4
ELECTRICAL PERFORMANCE.....	6
Active Gain (dB)	6
LNA Gain (dB)	7
Active 2D Radiation Patterns (1550-1605 MHz).....	8
Active 3D Radiation Patterns (1550-1605 MHz).....	9
WELCOME ALL ANTENNA OEM/ODM PROJECTS.....	10

www.aboosty.com

The materials provided herein, which are intended for illustration purposes only, are believed to be reliable and correct. However, no responsibility is further assumed for inaccuracies or incompleteness, and all such information shall be entirely at the user's risk. All information is subject to change without prior notice.

Copyright © 2024 ShenZhen MyAntenna RF Technology Co., Ltd. All Rights Reserved.




FEATURES & BENEFITS

- 18x18x4mm embedded ceramic patch antenna
- Miniaturized, multi-system compatible
- High gain, high sensitivity, highly reliable
- Low power consumption, supports multiple frequency bands
- Longer cables available, supports cable and connector customization

APPLICATIONS

- Satellite Navigation Receivers
- Geodetic Surveying and Mapping
- Channel Surveying and Mapping
- Precision Agriculture
- Marine Surveying
- Asset and Fleet Tracking
- Oil, Gas, and Mining Industries
- M2M Applications
- Hand-held/Portable Devices
- BeiDou B1 Band / GPS L1 Band / GLONASS G1 Band

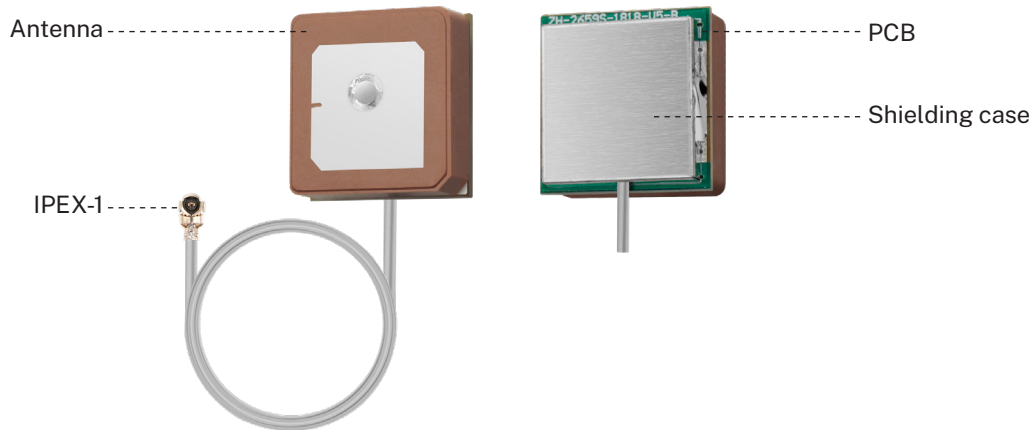

ORDER INFORMATION

Product Name	Circularly Polarized Active GPS Ceramic Antenna	
Dimensions	18 x 18 x 4 mm	
Weight	6g	
Mounting	Internal/Embedded/Adhesive mount	
Model	AIGC020	AIGC021
Part Number	M04-0103720R0A	M04-0103740R0A
Cable Length	150 mm	100 mm
Cable and Connector	Default IPEX 1, RF 1.13 (Ø 1.13 mm) coaxial cable, customizable.	



MECHANICAL DIMENSIONS

REV.	DESCRIPTION	APPD.	DATE
A	INITIAL RELEASED	Chen	2024/07/16

7.30±0.5

18.00±0.3

18.00±0.3

150.0±3.0

"A"

2.10±0.2

3.00±0.2

DETAIL A
SCALE 4:1

No.	Name	Material	Color	Treatment	Amount	Remark
4	CABLE ASSY		Black	Φ1.13Coaxial Line, 1.13 RF 1	1	
3	Ceramic Patch		Black	18.0*18.0*4.0mm	1	
2	PCBA		Green	18.0*18.0*0.6mm	1	
1	Shielding Case		Silvery	16.0*16.0*2.0mm	1	

F	DIMENSIONS ARE IN MILLIMETERS		CUS P/N:									
	UNLESS OTHERWISE SPECIFIED TOLERANCES		PART NO.:									
	ANGLES = ±3°		M04-0103720R0A		TITLE:							
	UP TO 6 = ±0.1				18*18*4 Active GPS Ceramic Antenna							
6-40 = ±0.2				DWG NO.:								
40-120 = ±0.6				<table border="1" style="display: inline-table; vertical-align: middle;"> <tr> <th>SCALE</th> <th>SHEET</th> <th>REV.</th> </tr> <tr> <td>1:1</td> <td>1/1</td> <td>V01</td> </tr> </table>			SCALE	SHEET	REV.	1:1	1/1	V01
SCALE	SHEET	REV.										
1:1	1/1	V01										
120-315 = ±1.0												
ABOVE 315 = ±1.6												



REV.	DESCRIPTION	APPD.	DATE
A	INITIAL RELEASED	Chen	2024/07/16

DETAIL A
SCALE 4:1

4	CABLE ASSY	/	Black	Φ1.13Coaxial Line ,1.13 RF 1	1	
3	Ceramic Patch		Black	18.0*18.0*4.0mm	1	
2	PCBA		Green	18.0*18.0*0.6mm	1	
1	Shielding Case		Silvery	16.0*16.0*2.0mm	1	
No.	Name	Material	Color	Treatment	Amount	Remark

F	DIMENSIONS ARE IN MILLIMETERS		CUS P/N:						
	UNLESS OTHERWISE SPECIFIED		PART NO.:						
	TOLERANCES		M04-0103740R0A		TITLE:				
	ANGLES = ±3° UP TO 6 = ±0.1 6-40 = ±0.2 40-120 = ±0.6 120-315 = ±1.0 ABOVE 315 = ±1.6		APPD: 陈建坊		DWG NO.:				
		CHKD: 陈建坊					SCALE	SHEET	REV.
		DR: 董有松		1:1			1/1	V01	
5		6		7		8			



REFERENCE GUIDE

Antenna			
Frequency	1550-1605 MHz		
Technical Features	BeiDou	GPS	GLONASS
	1561 ± 2 MHz	1575.42 ± 2 MHz	1602 ± 5 MHz
Frequency Bands	B1 Band	L1 Band	G1 Band
Axial Ratio (AR)	<1.5 dB		
Input Impedance	50 Ω		
Polarization	RHCP		
Radiation Pattern	Directional		
LNA			
Active Gain	31.34 dB	26.04 dB	30.99 dB
LNA Gain	24.24 dB	23.72 dB	24.05 dB
Noise Figure	1.5 Max		
DC Voltage	3.3 ± 0.3 V		
DC Current	12 ± 2 mA (@3.0 V)		
Mechanical			
Antenna Dimension	18 x 18 x 4 mm		
Antenna Material	Dielectric ceramics		
Shielding Case Dimension	16 x 16 x 2.0 mm		
Shielding Case Material	Tin		
PCB Material	FR4		
All data were measured with an 100-mm-long RF 1.13 cable. Application data might vary.			



Environmental			
Operating Temperature	-40°C to +85°C		
Storage Temperature	-40°C to +90°C		
Relative Humidity	Non-condensing 65°C 95% RH		
Vibration	Wave Form: Random Vibration		
	Test Time: 30min/Axis		
	Direction: X, Y, Z Axis		
	PSD Break Points for 9.8 RMS (m/s ²)	Frequency (Hz)	50
	Acceleration ((m/s ²) ² /Hz)	0.38416	0.38416
Antenna Certificaton			
RoHS Approval	Compliant [2011/65/EU&2015/863]		
REACH Approval	Conform or declared [(EC)1907/2006]		
Hazardous material regulation conformance: A certificate of conformance is available upon request. Feel free to consult us for details.			




ELECTRICAL PERFORMANCE

© Note

All data displayed in "ELECTRICAL PERFORMANCE" were measured with a 100-mm-long RF 1.13 cable.


Active Gain (dB)

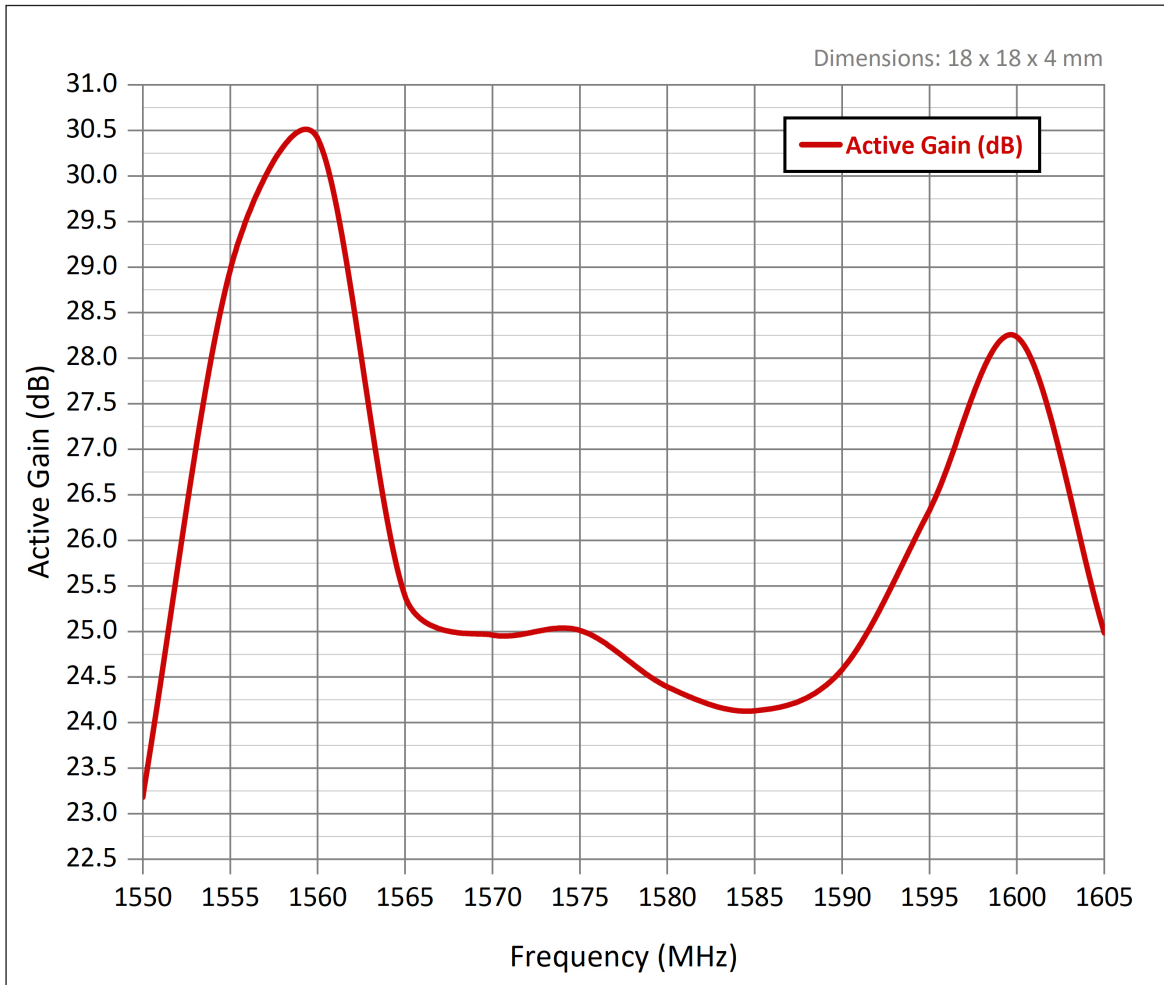

(Note: Data were tested with 100 mm of RF 1.13 cable.)




LNA Gain (dB)

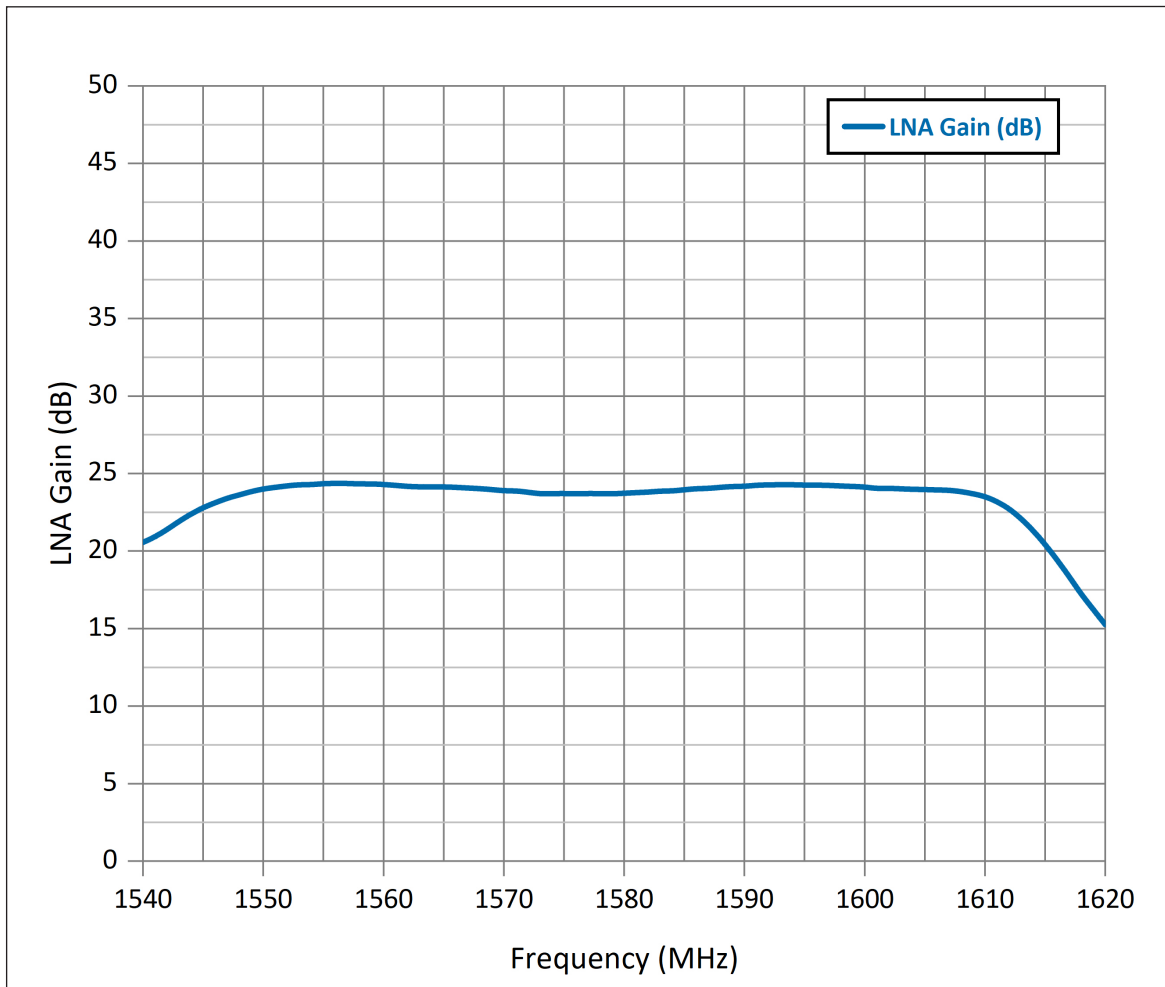


(Note: Data were tested with 100 mm of RF 1.13 cable.)

Antenna Data					
Freq (MHz)	Active Gain (dB)	LNA Gain (dB)	Freq (MHz)	Active Gain (dB)	LNA Gain (dB)
1550	22.12	24.00	1580	25.03	23.72
1555	28.31	24.35	1585	24.45	23.95
1560	31.34	24.29	1590	24.80	24.17
1565	28.80	24.14	1595	26.82	24.25
1570	27.00	23.88	1600	30.99	24.14
1575	26.04	23.72	1605	29.54	23.97


Active 2D Radiation Patterns (1550-1605 MHz)

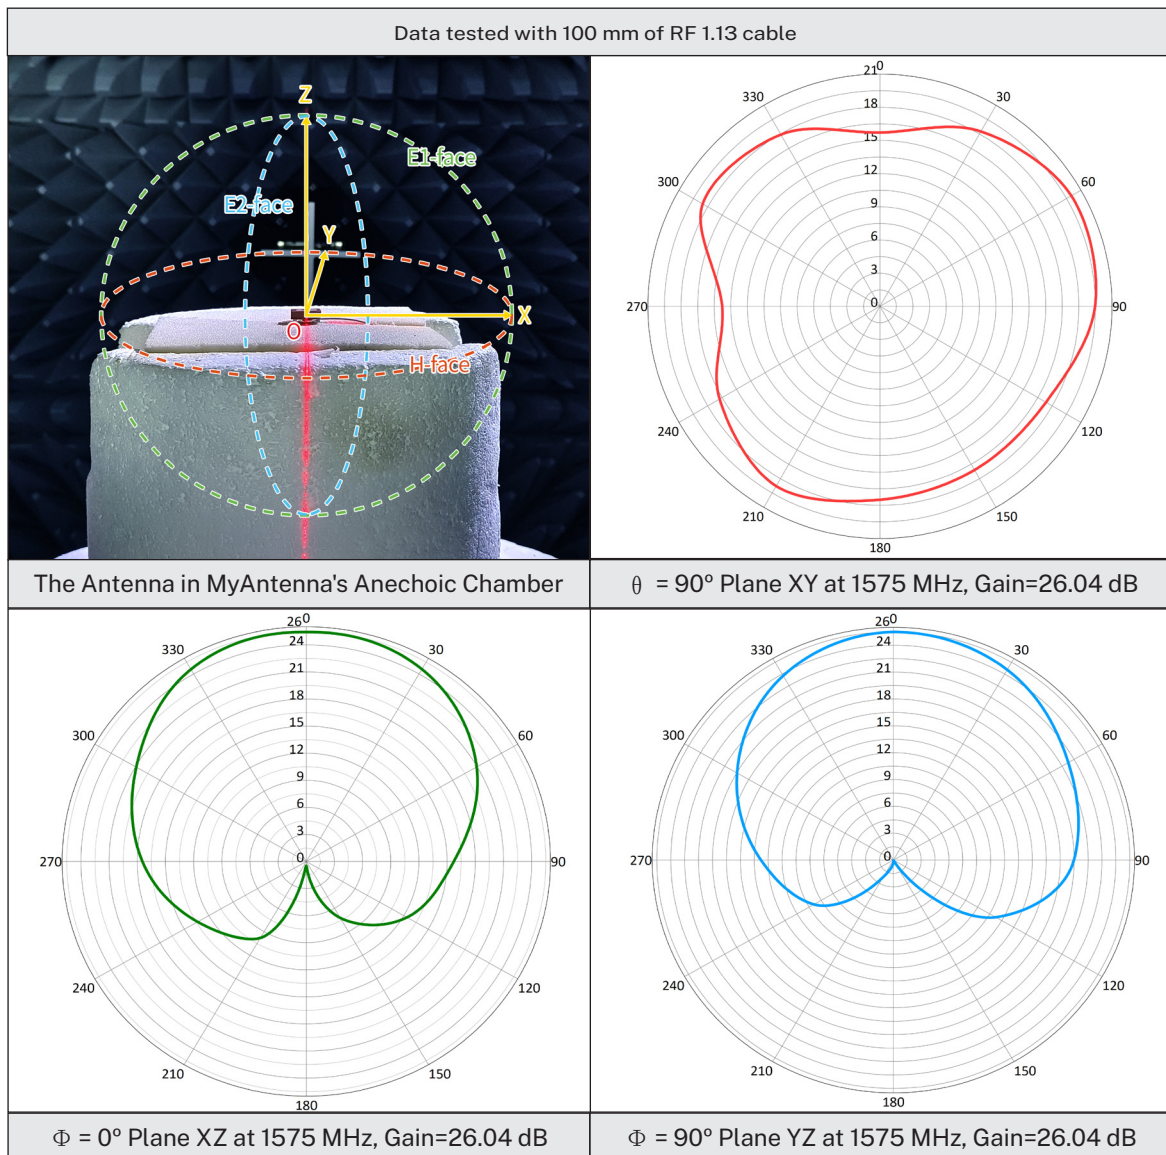

Active 3D Radiation Patterns (1550-1605 MHz)

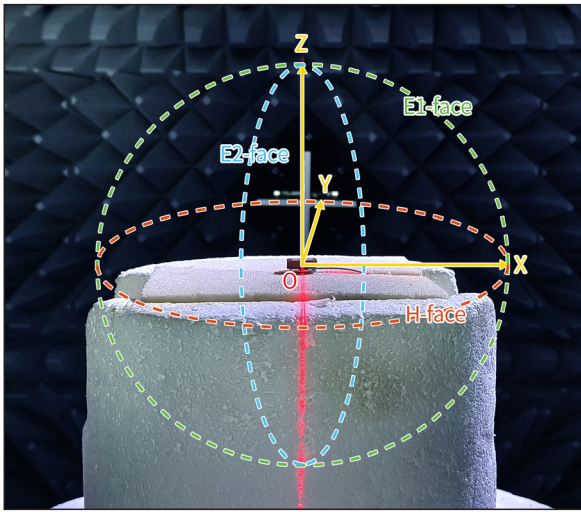

The Antenna in MyAntenna's Anechoic Chamber

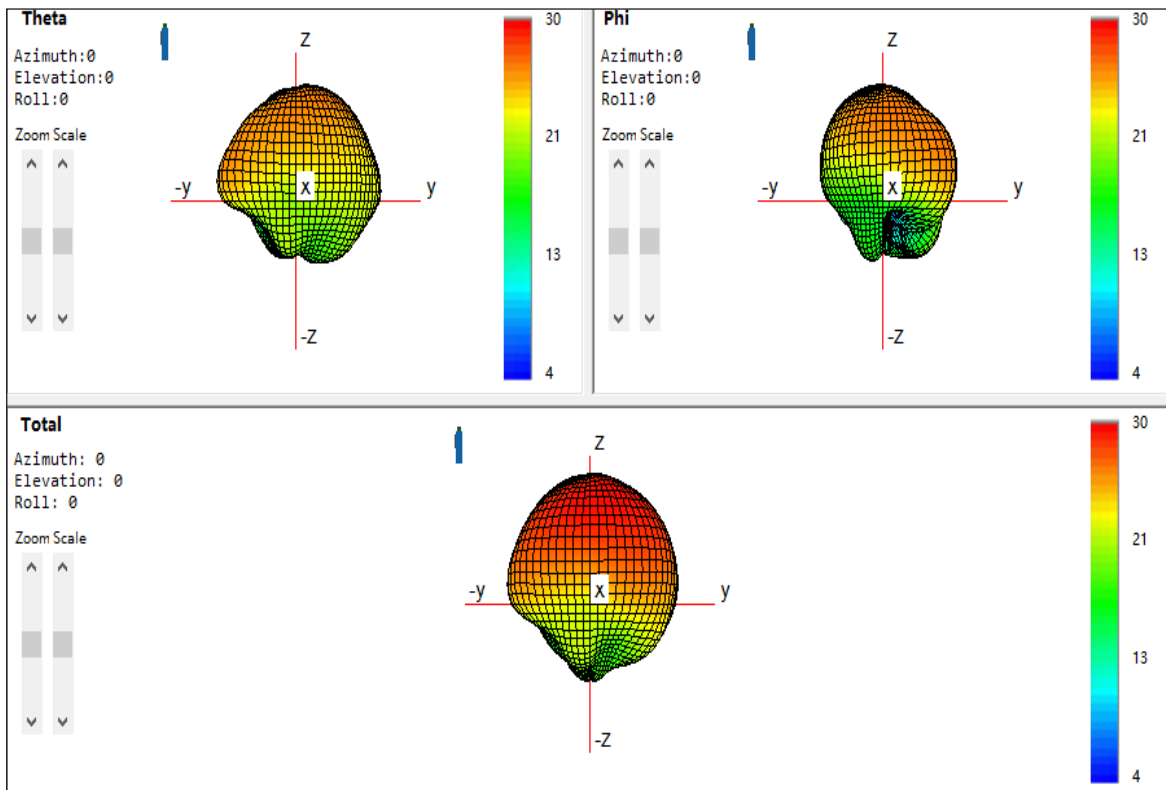

(Note: Data were tested with 100 mm of RF 1.13 cable.)



WELCOME ALL ANTENNA OEM/ODM PROJECTS

About ABOOSTY



10+ years in antenna R&D, production, and OEM/ODM



House of Aboosty: 450,000 units annual output capacity



Factory directly competitive price



Industry-leading quality levels



Professional team-work & support



Quick price and lead time estimation

Why Choose ABOOSTY



Innovative and patented design solutions



Full terminal devices anechoic chamber test



Co-location with its custom



Competitive price



Strict inspection




Prompt reply within 24h

What We Provide

OEM/ODM Services	
Light Customization	Deep Customization
<ul style="list-style-type: none"> Logo Packaging Cables & Connectors 	<ul style="list-style-type: none"> In-depth tailoring for specific applications Functional enhancements Environmental adaptations Vertical certifications ...


Custom Process

Light Customization Process

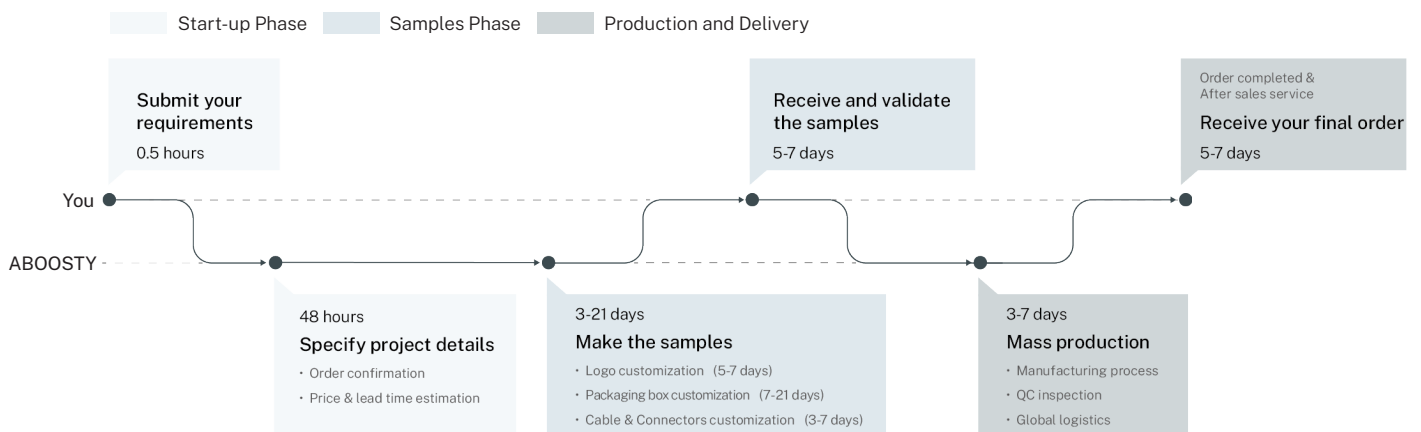



Deep Customization Process

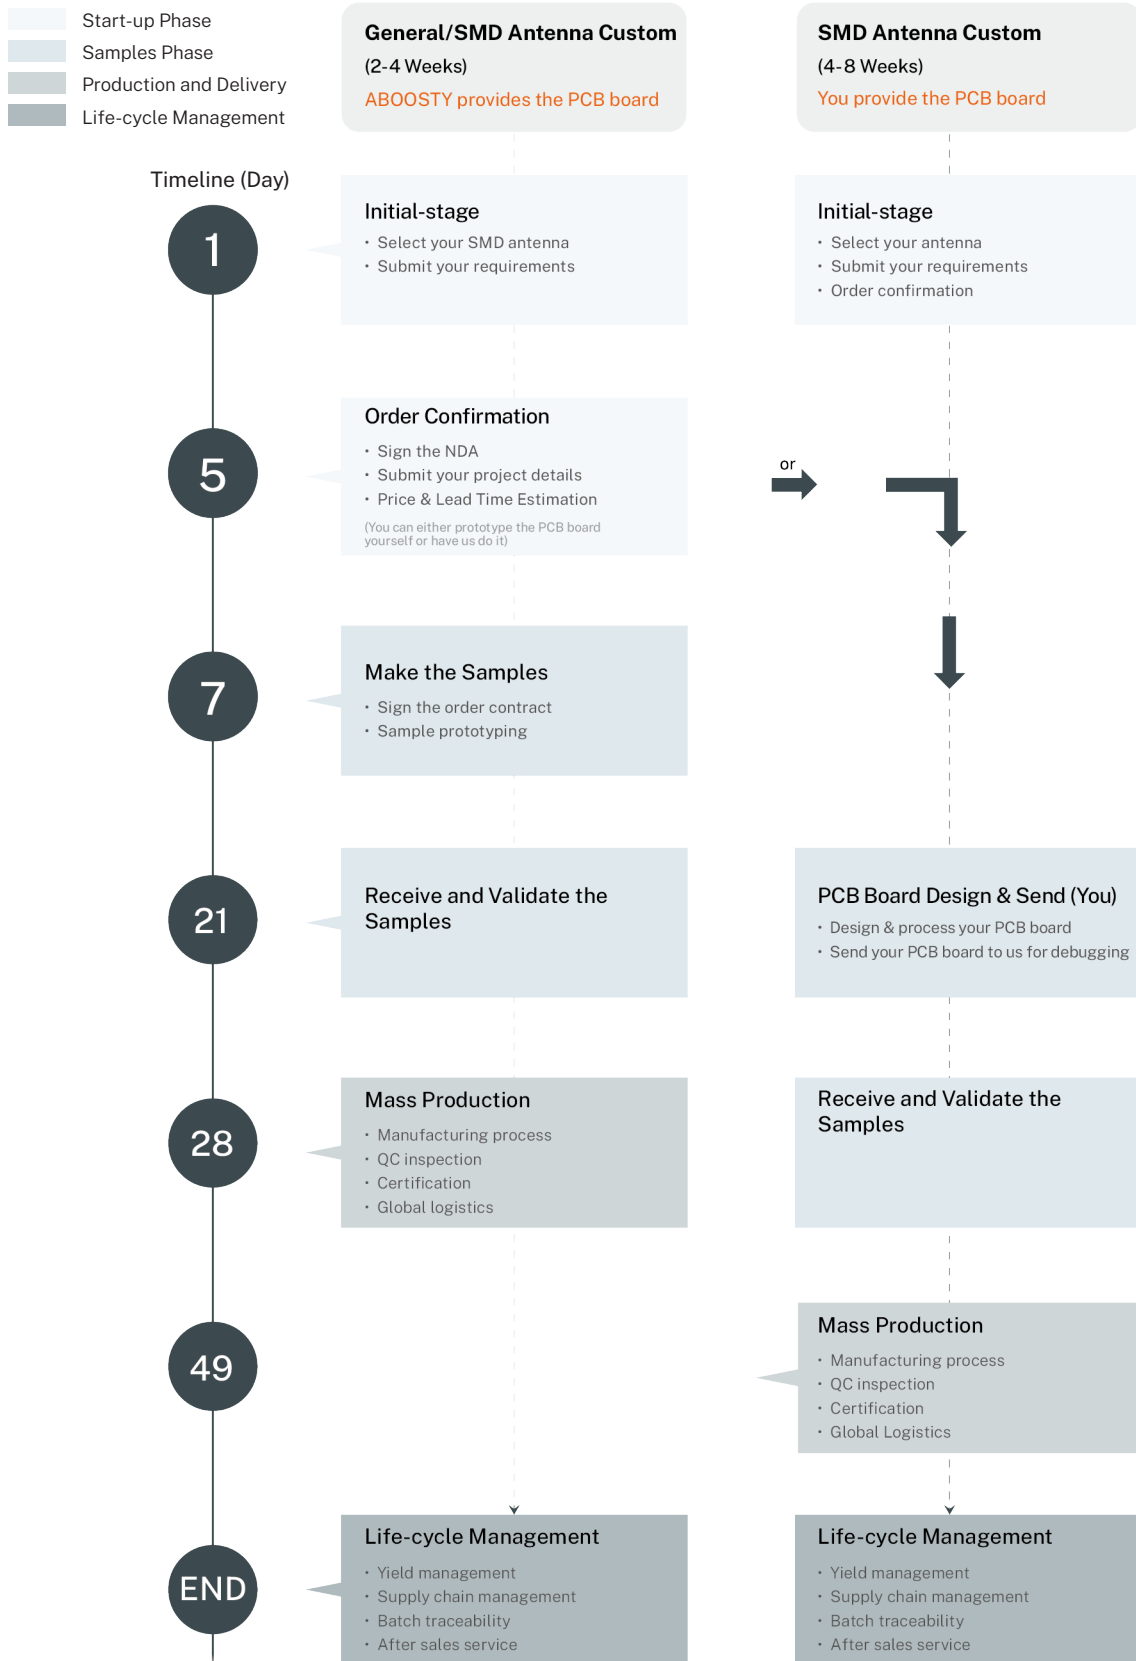

Boost Your Signal
with Our Antennas

ABOOSTY

A Globally Leading Manufacturer and Supplier of
Multi-band Combination Antennas

Contact us:

 support@aboosty.com

 +86-13924678201

Visit us:

 www.aboosty.com

Search to follow us or to get technical support.



@Aboosty



Aboosty Antenna



Or click here to reach us directly.

