

# Datasheet

Circularly Polarized Passive GPS Embedded Ceramic Patch Antenna

**Model:** AIGC005

**PN:** M04-0103930R0A

**Description:**

GPS/GALILEO/BeiDou Passive Patch Antenna

Operating Frequency: 1575.42±2 MHz

**Features:**

SMT-Compatible Embedded Antenna

Ceramic Patch Element

Low Axial Ratio

Dimensions: 25 x 25 x 4 mm

Adhesive Mount

RoHS & Reach Compliant





# Table of Contents

FEATURES & BENEFITS .....	1
APPLICATIONS .....	1
ORDER INFORMATION .....	1
GNSS FREQUENCY BANDS .....	2
REFERENCE GUIDE .....	3
ELECTRICAL PERFORMANCE .....	4
S11 .....	4
Passive Gain (dBi) and Total Efficiency (%) .....	5
MECHANICAL DIMENSIONS.....	6
ABOOSTY WELCOME ALL ANTENNA OEM/ODM PROJECTS.....	7

 Global Site: [www.aboosty.com](http://www.aboosty.com)  China Site: [www.aboosty.cn](http://www.aboosty.cn)

The materials provided herein, which are intended for illustration purposes only, are believed to be reliable and correct. However, no responsibility is further assumed for inaccuracies or incompleteness, and all such information shall be entirely at the user's risk. All information is subject to change without prior notice.

Copyright © 2025 ShenZhen MyAntenna RF Technology Co., Ltd. All Rights Reserved.

Aboosty™ is owned by Shenzhen MyAntenna RF Technology Co., Ltd. (often abbreviated as MyAntenna).



## FEATURES & BENEFITS

- 25x25x4mm Embedded Ceramic Patch Element
- Miniaturized, Multi-system Compatible
- Low Axial Ratio
- Adhesive Mount
- RoHS & Reach Compliant
- Covering Bands: GPS (L1) / Galileo (E1) / BeiDou (B1)

## APPLICATIONS

- Satellite Navigation Receivers
- Geodetic Surveying and Mapping
- Channel Surveying and Mapping
- Precision Agriculture
- Marine Surveying
- Asset and Fleet Tracking
- Oil, Gas, and Mining Industries
- M2M Applications
- Hand-held/Portable Devices



Antenna Image

## ORDER INFORMATION


<b>Product Name</b>	Circularly Polarized Passive GPS Embedded Ceramic Patch Antenna
<b>Model</b>	AIGC005
<b>Part Number</b>	M04-0103930R0A
<b>Dimensions</b>	25 x 25 x 4 mm
<b>Weight</b>	10 g
<b>Mounting</b>	Internal/Embedded/Adhesive Mount
<b>MOQ</b>	500 pcs
<b>Custom Options</b>	Logo, Packaging, Cable and Connectors



## GNSS FREQUENCY BANDS

GNSS Frequency Bands Covered					
GPS	L1	L2	L5		
	●	○	○		
GLONASS	G1	G2	G3		
	○	○	○		
Galileo	E1	E5a	E5b	E6	
	●	○	○	○	
Bei Dou	B1I	B1C	B2a	B2b	B3
	●	●	○	○	○
QZSS (Regional)	L1	L2C	L5	L6	
	●	○	○	○	
IRNSS(Regional)	L5				
	○				
SBAS	L1/E1/B1	L5/B2a/E5a	G1	G2	G3
	●	○	○	○	○

\*SBAS systems: WASS(L1/L5), EGNOS(E1/E5a), SDCM(G1/G2/G3), SNAS(B1,B2a), GAGAN(L1/L5), QZSS(L1/L5), KAZZ(L1/L5).

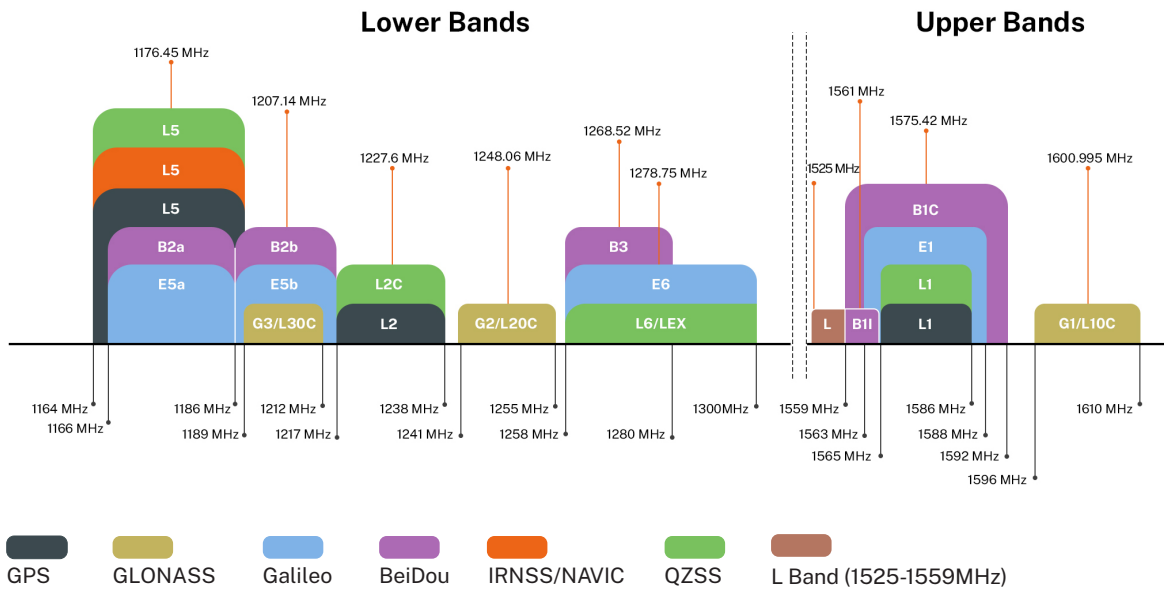



## REFERENCE GUIDE

Antenna	
Frequency	1575.42±2 MHz
Bandwidth	10 MHz
VSWR	1.5 : 1
Peak Gain (dBi)	3.5
Axial Ratio (dB)	<3
Polarization	RHCP
Radiation Pattern	Directional
Input Impedance	50 Ω



Environmental			
Operating Temperature	-40°C to +75°C		
Storage Temperature	-40°C to +85°C		
Relative Humidity	40% to 95%		
Vibration	Wave Form: Random Vibration		
	Test Time: 30min/Axis		
	Direction: X, Y, Z Axis		
	PSD Break Points for 9.8 RMS (m/s <sup>2</sup> )	Frequency (Hz)	50
Acceleration ((m/s <sup>2</sup> ) <sup>2</sup> /Hz)		0.38416	0.38416
RoHS Compliant	Yes		
All data were measured with an Ø80 mm ground plane. Application data might vary.			

## ELECTRICAL PERFORMANCE

© Note

All data displayed in "ELECTRICAL PERFORMANCE" were measured with an Ø80 mm ground plane.


### S11

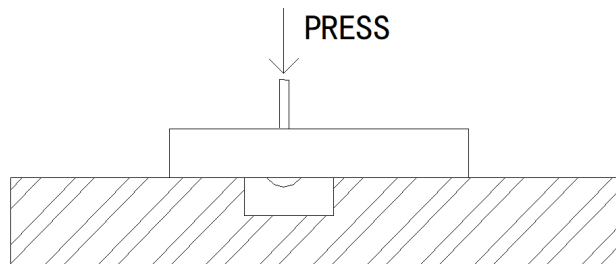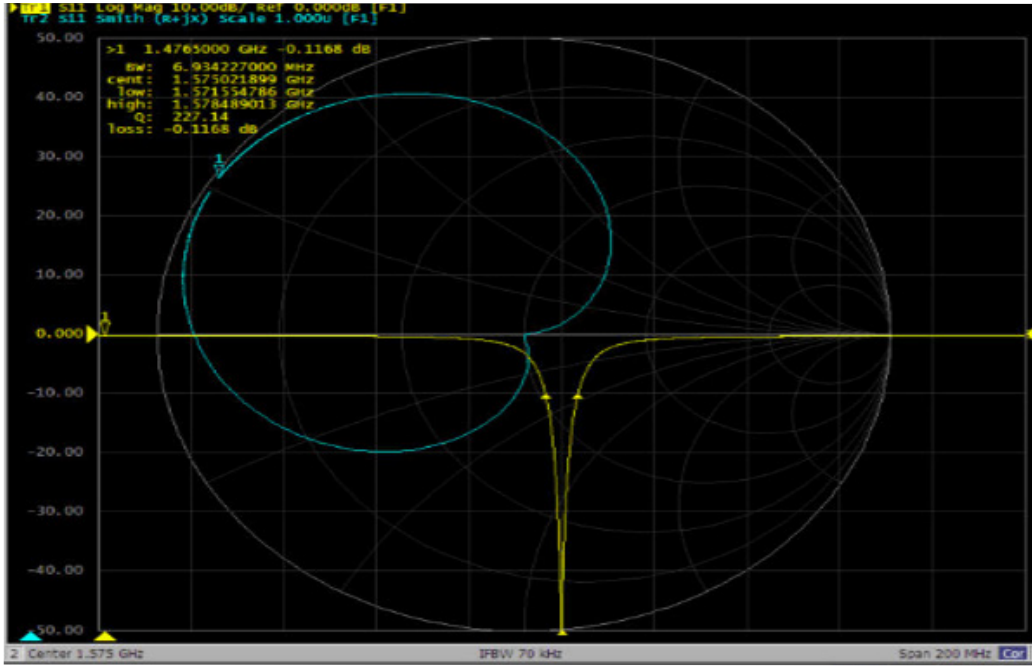

Item	Specification After Test (MHz)
Center Frequency Change	±2.0
-10dB Bandwidth Change	±2.0




## Passive Gain (dBi) and Total Efficiency (%)

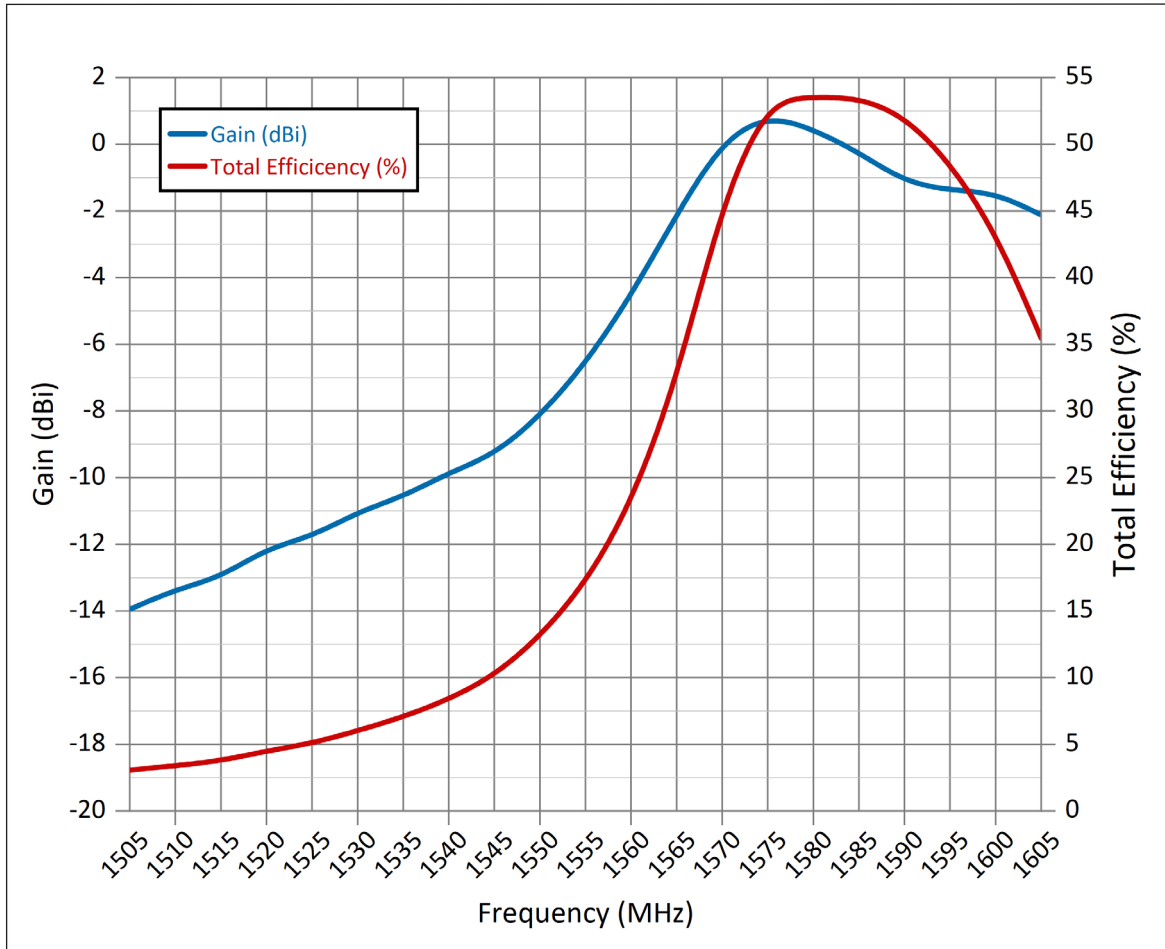

Freq (MHz)	Gain (dBi)	Efficiency (%)	Freq (MHz)	Gain (dBi)	Efficiency (%)
1505	-13.95	3.07	1560	-4.55	22.99
1510	-13.36	3.39	1565	-2.1	32.24
1515	-12.99	3.77	1570	0.12	45.67
1520	-12.12	4.5	1575	0.89	53.37
1525	-11.77	5.07	1580	0.45	53.52
1530	-11.03	6.02	1585	-0.24	53.5
1535	-10.57	7.05	1590	-1.14	52.13
1540	-9.85	8.38	1595	-1.38	48.64
1545	-9.32	10.13	1600	-1.45	43.44
1550	-8.16	13.07	1605	-2.12	35.45
1555	-6.58	17.06			



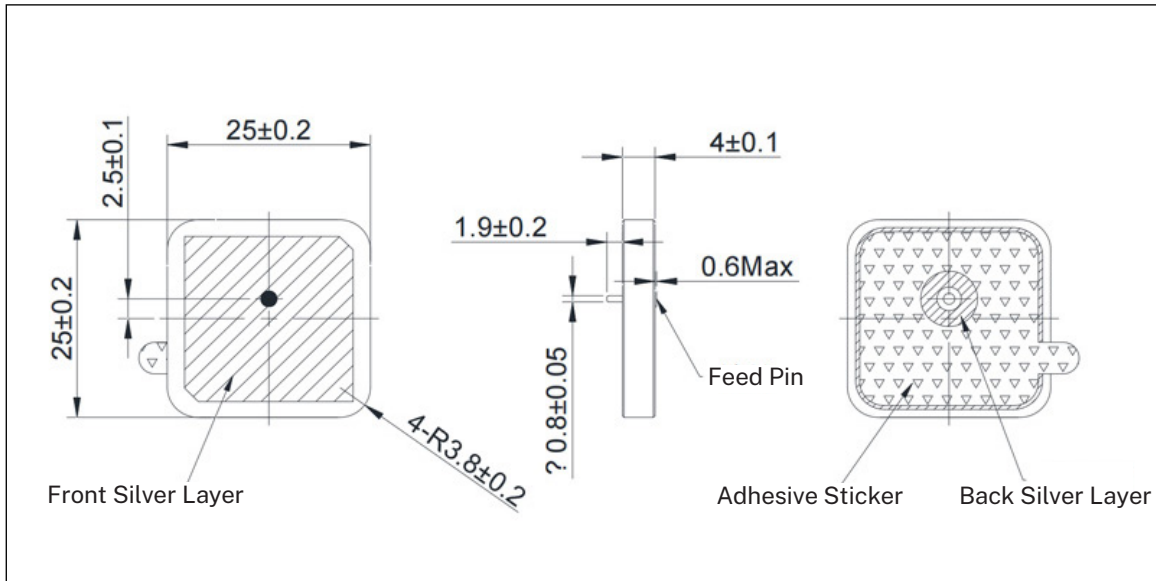



## MECHANICAL DIMENSIONS





# ABOOSTY WELCOME ALL ANTENNA OEM/ODM PROJECTS

## Why Choose ABOOSTY


					
10+ years in antenna R&D, production, and OEM/ODM	MES system supported factory; 50M+ units annual output capacity	Factory directly competitive price	Quick price and lead time estimate	Innovative and patented design solutions	Professional team support & prompt reply within 24h

## What We Provide


OEM/ODM Services	Light Customization	Deep Customization
	<ul style="list-style-type: none"> <li>• Logo</li> <li>• Packaging</li> <li>• Cables &amp; Connectors</li> </ul>	<ul style="list-style-type: none"> <li>• In-depth tailoring for specific applications</li> <li>• Functional enhancements</li> <li>• Environmental adaptations</li> <li>• Vertical certifications</li> <li>• ...</li> </ul>

## Custom Process

### Light Customization Process

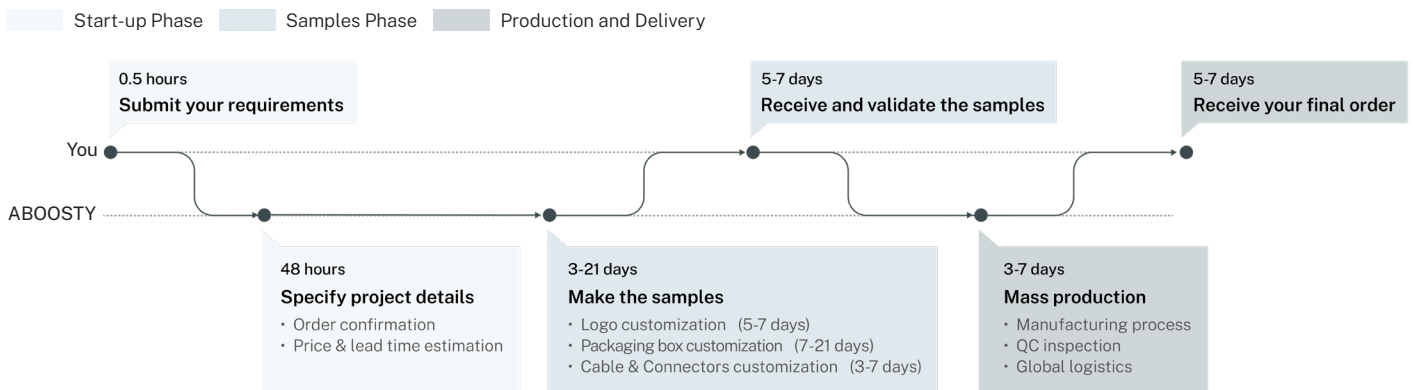

### Deep Customization Process

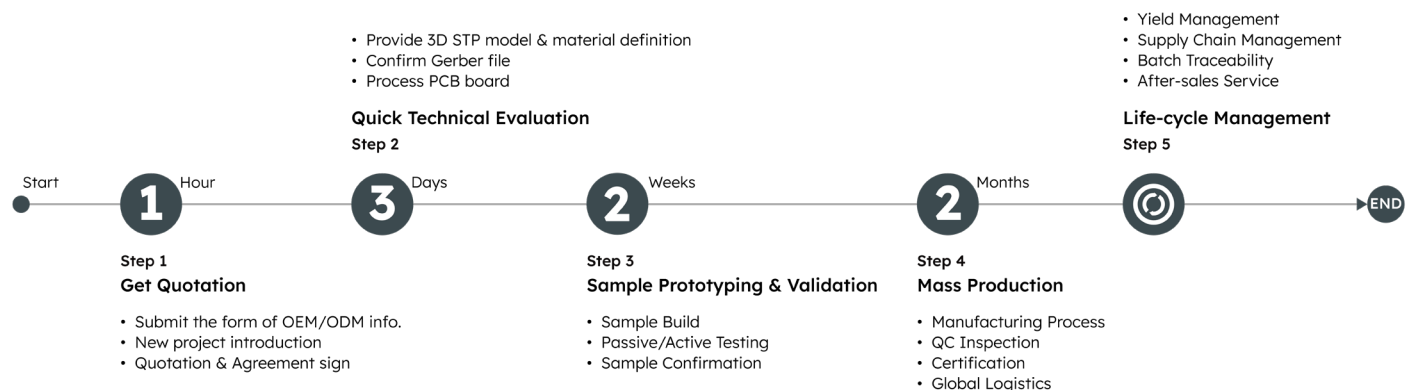

**Note:** You can let us handle the PCB prototyping or do it yourself. Choosing self-prototyping may add 2 to 5 weeks to the timeline.


Boost Your Signal  
with Our Antennas

# ABOOSTY

A Globally Leading Manufacturer and Supplier of  
Multi-band Combination Antennas

Contact us:


 [support@aboosty.com](mailto:support@aboosty.com)


 +86-13924678201

Find us (Global):

 [www.aboosty.com](http://www.aboosty.com)

Search to follow us or to get technical support.



 Or click here to reach us directly.   

 国内官网: [www.aboosty.cn](http://www.aboosty.cn)

