

5G Magnetic Blade Antenna

FEATURES



- Can be mounted on Metal and non-metallic surfaces
- Customized product development supported



The MyAntenna M02-0100160R0A range of antennas are designed to decrease the lifetime cost of M2M and mobile device installations by offering a robust, effective antenna that is easy to install and lasts the lifetime of the installation without the need for maintenance.

The antenna offers ground-plane independent Omni-directional performance across global cellular and LTE bands making it a versatile solution for any number of applications. The efficient element design ensures a high first time connection rate and an ongoing, robust communications link even in problematic coverage areas.

Aboosty™ is owned by Shenzhen MyAntenna RF Technology Co., Ltd. (often abbreviated as MyAntenna).

PRODUCTS

Part No.	Weight	Dimensions (L x W x H)	cable	installation	Connector	Color
M02-0100160R0A	52.3g	Φ61*166.3mm	Φ2.8*1000mm	Magnetic Suction	SMA MALE	Black

SPECIFICATIONS

PARAMETER	SPECIFICATION
Frequency (MHz)	617-960 1400-6000
VSWR (Max)	4.0:1 3.0:1
Peak Gain, dBi (Typ)	Up to 4.94@Mounted on metallic surfaces
Peak Efficiency, %	56.28%@Mounted on non-metallic surfaces
Nominal Impedance	50 Ω
Max Power (ambient temp of 25°C)	10 Watts
Azimuth Beam Width (deg)	Omnidirectional
Polarization	Linear
Radome	ABS, Black
Storage Temperature Range (°C)	-40° C to +85° C
Operational Temperature Range (°C)	-40° C to +85° C
Material Substance Compliance	RoHS Compliant


ELECTRICAL DATA

MyAntenna RF Technology Co., Ltd


ADD:No.RM 410, Country Garden Phoenix Wisdom Valley, No. 50 Tiezai Road, Baoan District, Shenzhen, P.R.China.

TEL: +86-0755-86503881 E-mail: nfc@myantenna.com


Return Loss (Mounted on non-metallic surfaces)

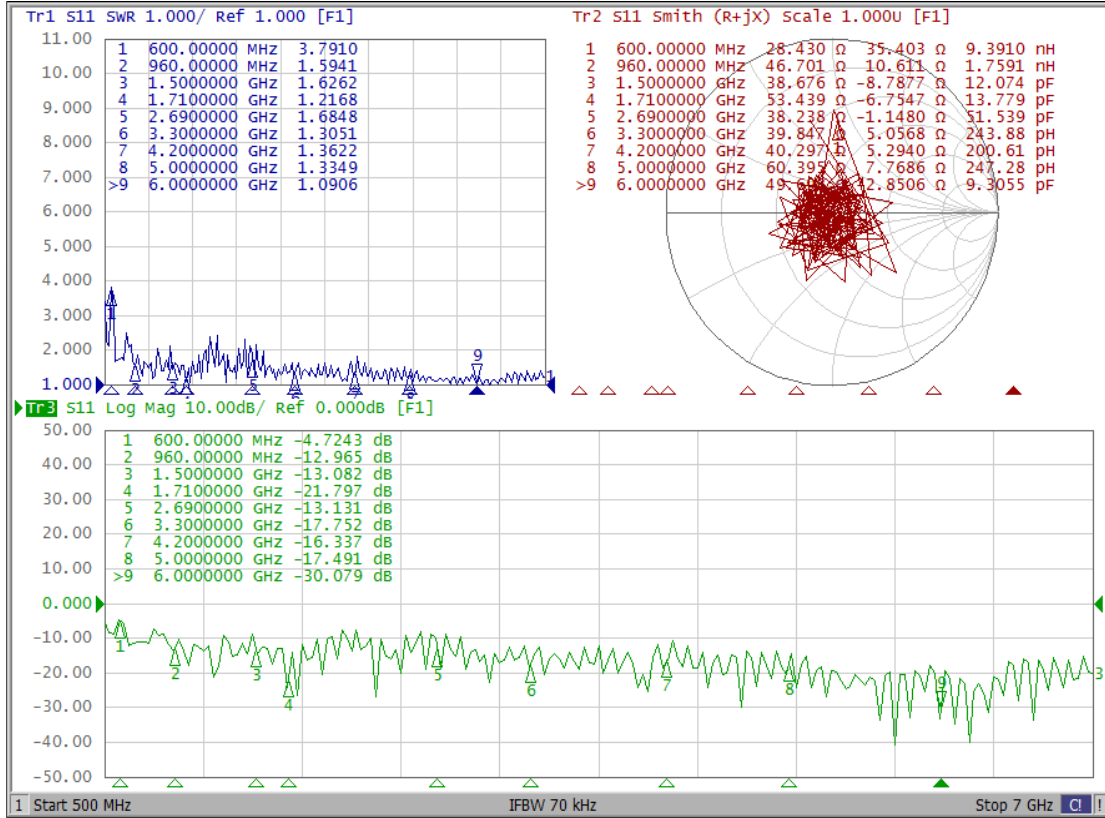


Return Loss (Mounted on metallic surfaces)

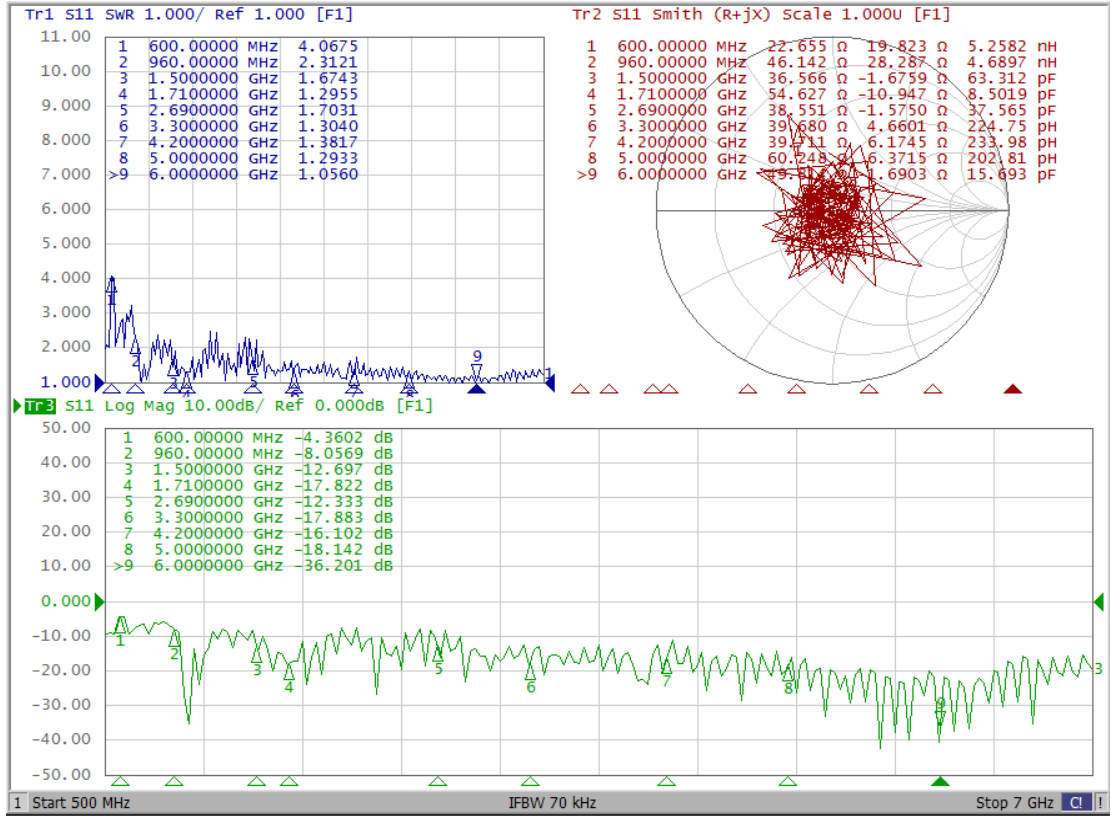

Efficiency (%)

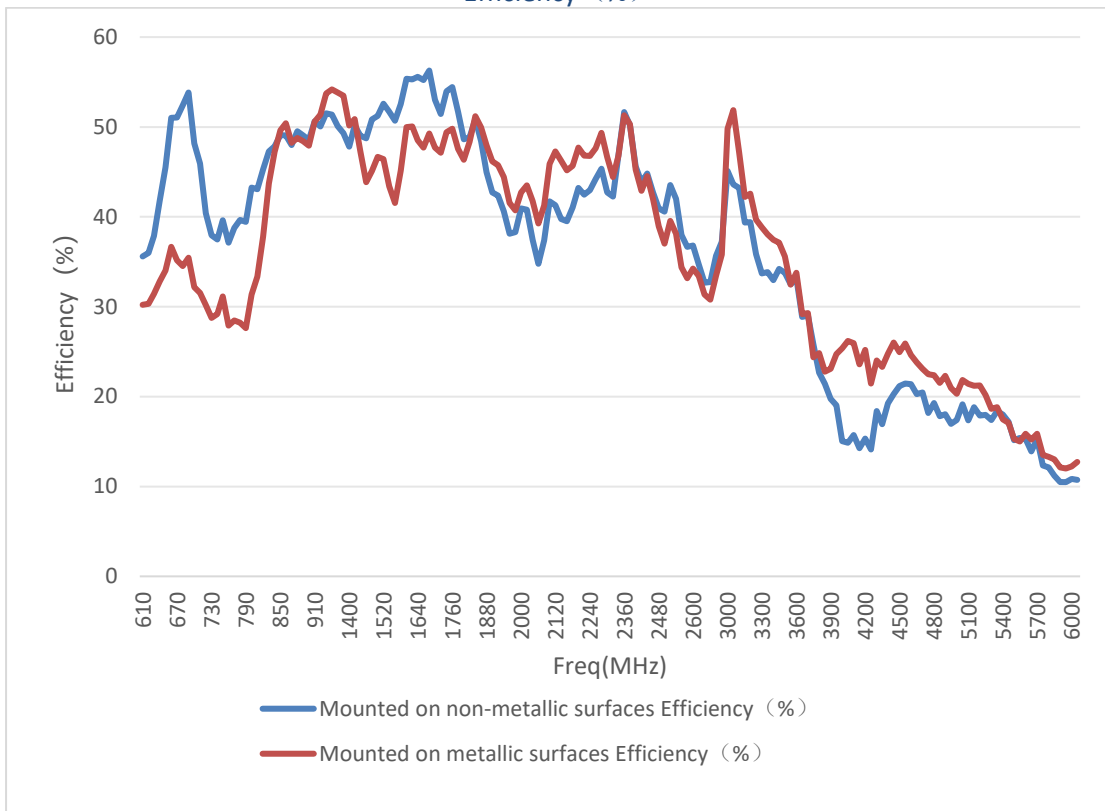

Peak Gain (dBi)

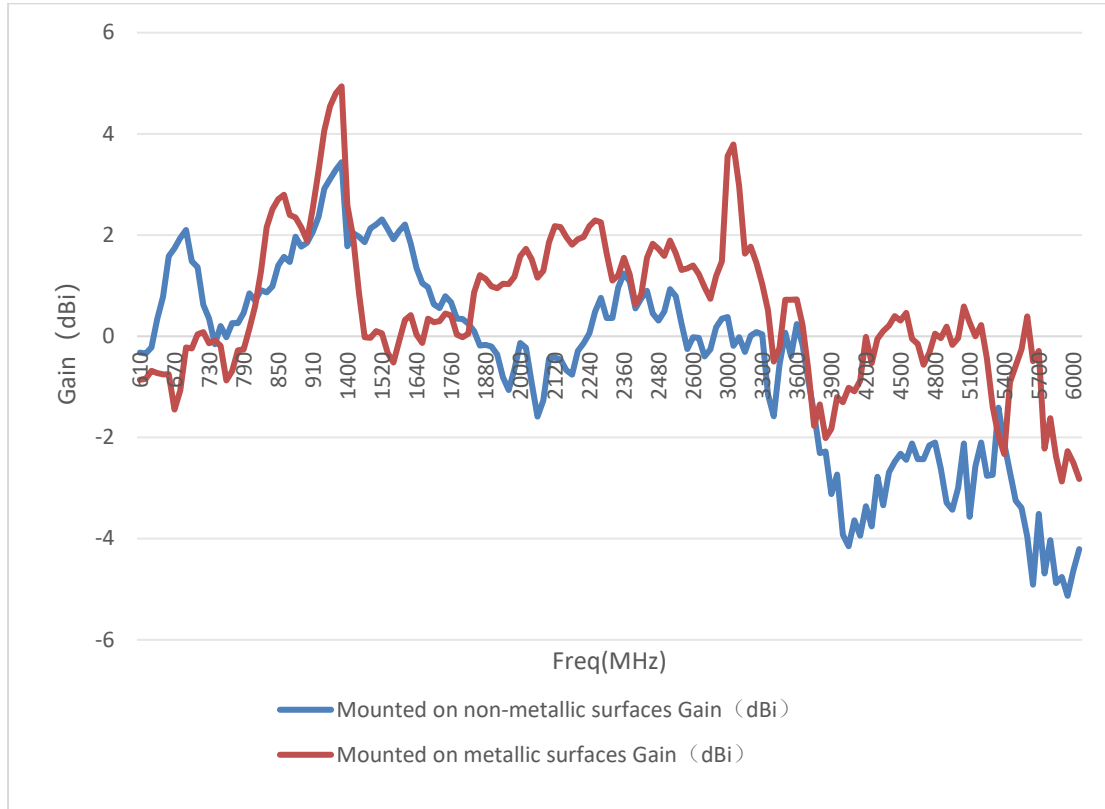

Mounted on non-metallic surfaces

Freq(MHz)	Gain (dBi)	Efficiency (%)	Freq(MHz)	Gain (dBi)	Efficiency (%)
610	-0.32	35.58	2320	0.36	42.27
620	-0.34	35.99	2340	0.96	46.84
630	-0.22	37.88	2360	1.24	51.65
640	0.34	41.79	2380	1.08	50.19
650	0.78	45.50	2400	0.55	45.59
660	1.58	51.03	2420	0.75	43.85
670	1.74	51.04	2440	0.90	44.81
680	1.94	52.39	2460	0.45	42.73
690	2.10	53.84	2480	0.31	40.93
700	1.48	48.18	2500	0.49	40.57
710	1.37	45.92	2520	0.93	43.53
720	0.62	40.40	2540	0.79	42.01
730	0.35	37.93	2560	0.25	37.97
740	-0.16	37.47	2580	-0.25	36.66
750	0.20	39.63	2600	-0.02	36.82
760	-0.02	37.11	2620	-0.03	34.71

770	0.26	38.78	2640	-0.40	32.66
780	0.26	39.65	2660	-0.26	32.74
790	0.46	39.43	2680	0.18	35.67
800	0.85	43.27	2690	0.35	37.22
810	0.70	43.07	3000	0.38	45.11
820	0.91	45.27	3050	-0.19	43.62
830	0.87	47.28	3100	-0.02	43.23
840	0.99	47.86	3150	-0.31	39.37
850	1.40	49.08	3200	0.01	39.39
860	1.57	49.07	3250	0.08	35.86
870	1.47	48.00	3300	0.04	33.71
880	1.97	49.54	3350	-1.15	33.86
890	1.77	49.07	3400	-1.58	32.97
900	1.85	48.55	3450	-0.56	34.21
910	2.06	50.62	3500	0.07	33.79
920	2.36	50.06	3550	-0.39	32.48
930	2.92	51.51	3600	0.24	33.16
940	3.11	51.36	3650	-0.17	28.86
950	3.29	50.09	3700	-0.87	29.05
960	3.44	49.30	3750	-1.52	25.85
1400	1.78	47.81	3800	-2.31	22.67
1420	2.04	50.16	3850	-2.28	21.43
1440	1.97	49.03	3900	-3.12	19.73
1460	1.86	48.73	3950	-2.73	19.02
1480	2.13	50.83	4000	-3.92	15.05
1500	2.21	51.24	4050	-4.15	14.86
1520	2.31	52.59	4100	-3.64	15.72
1540	2.12	51.71	4150	-3.94	14.25
1560	1.92	50.70	4200	-3.36	15.34
1580	2.08	52.54	4250	-3.76	14.11
1600	2.21	55.36	4300	-2.78	18.40
1620	1.83	55.28	4350	-3.34	16.93
1640	1.35	55.59	4400	-2.69	19.24
1660	1.05	55.21	4450	-2.48	20.27
1680	0.97	56.28	4500	-2.32	21.17
1700	0.63	53.02	4550	-2.44	21.46
1720	0.56	51.45	4600	-2.12	21.40
1740	0.79	53.98	4650	-2.43	20.29
1760	0.67	54.45	4700	-2.43	20.47
1780	0.35	51.68	4750	-2.16	18.19

1800	0.34	48.62	4800	-2.10	19.29
1820	0.25	48.85	4850	-2.62	17.83
1840	0.10	50.88	4900	-3.29	18.02
1860	-0.18	48.41	4950	-3.43	16.97
1880	-0.17	44.97	5000	-3.00	17.39
1900	-0.20	42.73	5050	-2.12	19.15
1920	-0.36	42.35	5100	-3.57	17.36
1940	-0.81	40.61	5150	-2.57	18.81
1960	-1.06	38.14	5200	-2.10	17.91
1980	-0.65	38.31	5250	-2.76	17.98
2000	-0.13	40.93	5300	-2.74	17.41
2020	-0.23	40.78	5350	-1.41	18.40
2040	-0.93	37.45	5400	-2.12	18.01
2060	-1.59	34.79	5450	-2.69	17.18
2080	-1.27	37.37	5500	-3.25	15.16
2100	-0.44	41.72	5550	-3.39	15.40
2120	-0.42	41.30	5600	-3.96	15.29
2140	-0.46	39.78	5650	-4.91	13.92
2160	-0.67	39.52	5700	-3.51	15.30
2180	-0.76	41.06	5750	-4.69	12.33
2200	-0.29	43.20	5800	-4.03	12.12
2220	-0.14	42.46	5850	-4.88	11.19
2240	0.06	42.98	5900	-4.76	10.49
2260	0.49	44.21	5950	-5.13	10.50
2280	0.76	45.34	6000	-4.63	10.85
2300	0.36	42.72	6050	-4.21	10.75

Mounted on metallic surfaces


Freq(MHz)	Gain (dBi)	Efficiency (%)	Freq(MHz)	Gain (dBi)	Efficiency (%)
610	-0.86	30.21	2320	1.10	44.42
620	-0.84	30.33	2340	1.20	46.79
630	-0.68	31.43	2360	1.55	51.29
640	-0.73	32.80	2380	1.22	50.31
650	-0.75	34.02	2400	0.63	45.25
660	-0.75	36.68	2420	0.82	42.91
670	-1.45	35.17	2440	1.55	44.55
680	-1.07	34.53	2460	1.83	42.01
690	-0.22	35.46	2480	1.73	38.95
700	-0.24	32.17	2500	1.59	37.02
710	0.04	31.54	2520	1.89	39.56
720	0.08	30.17	2540	1.64	38.13

730	-0.14	28.74	2560	1.31	34.39
740	-0.08	29.18	2580	1.34	33.17
750	-0.19	31.16	2600	1.40	34.24
760	-0.87	27.89	2620	1.23	33.41
770	-0.69	28.47	2640	0.97	31.36
780	-0.28	28.22	2660	0.74	30.77
790	-0.26	27.63	2680	1.19	33.47
800	0.15	31.37	2690	1.48	35.80
810	0.60	33.34	3000	3.56	49.82
820	1.28	37.82	3050	3.79	51.88
830	2.16	43.71	3100	2.96	47.19
840	2.51	47.23	3150	1.63	42.21
850	2.71	49.63	3200	1.77	42.59
860	2.80	50.43	3250	1.45	39.68
870	2.40	48.24	3300	1.03	38.85
880	2.35	48.78	3350	0.51	38.07
890	2.15	48.41	3400	-0.50	37.45
900	1.89	47.93	3450	-0.23	37.12
910	2.53	50.58	3500	0.72	35.58
920	3.27	51.39	3550	0.72	32.47
930	4.07	53.71	3600	0.73	33.77
940	4.55	54.18	3650	0.22	29.17
950	4.80	53.83	3700	-0.67	29.30
960	4.94	53.48	3750	-1.77	24.39
1400	2.58	50.16	3800	-1.35	24.83
1420	1.96	50.86	3850	-2.01	22.77
1440	0.87	47.23	3900	-1.83	23.08
1460	-0.02	43.86	3950	-1.20	24.73
1480	-0.03	45.10	4000	-1.30	25.39
1500	0.10	46.68	4050	-1.02	26.18
1520	0.06	46.41	4100	-1.09	25.94
1540	-0.33	43.40	4150	-0.88	23.59
1560	-0.52	41.56	4200	-0.01	25.21
1580	-0.09	45.13	4250	-0.53	21.47
1600	0.32	49.98	4300	-0.05	24.01
1620	0.42	50.04	4350	0.10	23.32
1640	0.03	48.52	4400	0.21	24.75
1660	-0.13	47.70	4450	0.40	26.01
1680	0.35	49.26	4500	0.31	24.96
1700	0.28	47.69	4550	0.46	25.91

1720	0.30	47.15	4600	-0.05	24.62
1740	0.45	49.40	4650	-0.15	23.80
1760	0.41	49.79	4700	-0.56	23.09
1780	0.03	47.57	4750	-0.33	22.49
1800	-0.02	46.37	4800	0.05	22.37
1820	0.05	48.33	4850	-0.04	21.54
1840	0.87	51.21	4900	0.19	22.31
1860	1.21	49.94	4950	-0.17	20.95
1880	1.13	47.95	5000	-0.04	20.31
1900	0.99	46.16	5050	0.59	21.83
1920	0.95	45.74	5100	0.27	21.41
1940	1.04	44.43	5150	0.00	21.22
1960	1.03	41.56	5200	0.22	21.25
1980	1.18	40.71	5250	-0.44	20.16
2000	1.58	42.72	5300	-1.39	18.64
2020	1.73	43.50	5350	-1.97	18.83
2040	1.52	41.74	5400	-2.33	17.48
2060	1.16	39.25	5450	-0.91	17.09
2080	1.29	41.26	5500	-0.58	15.31
2100	1.86	45.90	5550	-0.26	15.02
2120	2.18	47.29	5600	0.39	15.87
2140	2.16	46.26	5650	-0.49	15.23
2160	1.96	45.17	5700	-0.29	15.88
2180	1.81	45.67	5750	-2.22	13.50
2200	1.92	47.70	5800	-1.62	13.29
2220	1.96	46.83	5850	-2.38	13.03
2240	2.18	46.79	5900	-2.87	12.14
2260	2.29	47.63	5950	-2.27	12.00
2280	2.25	49.36	6000	-2.50	12.23
2300	1.64	46.65	6050	-2.82	12.72

RADIATION PATTERNS

2D Radiation Pattern at 800MHz (Mounted on non-metallic surfaces)

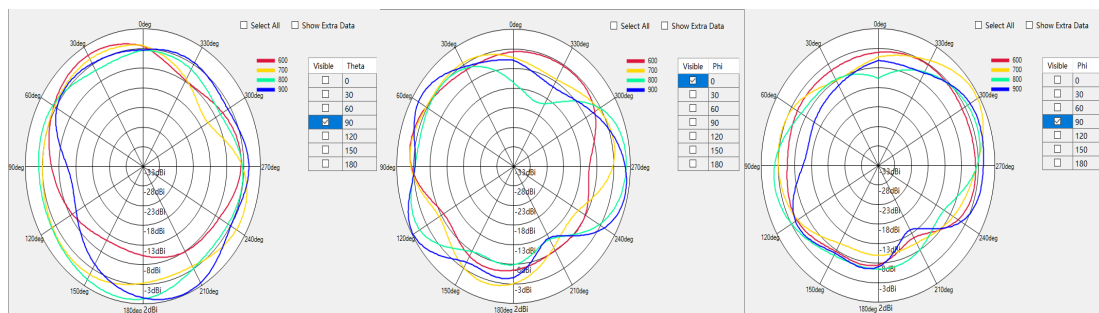


MyAntenna RF Technology Co., Ltd


ADD:No.RM 410, Country Garden Phoenix Wisdom Valley, No. 50 Tiezai Road, Baoan District, Shenzhen, P.R.China.

TEL: +86-0755-86503881 E-mail: nfc@imyantenna.com


2D Radiation Pattern at 1800MHz (Mounted on non-metallic surfaces)

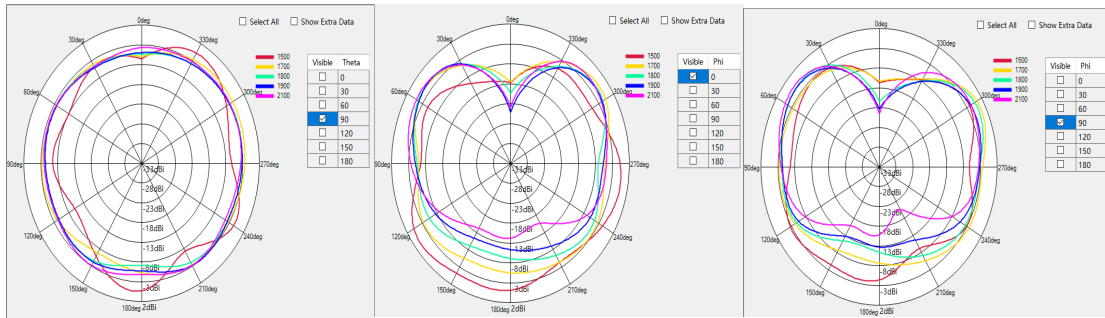


2D Radiation Pattern at 2500MHz (Mounted on non-metallic surfaces)

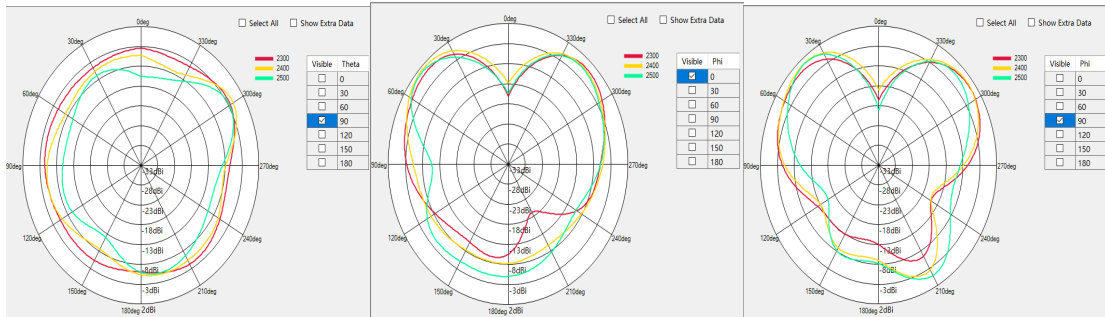


2D Radiation Pattern at 800MHz (Mounted on metallic surfaces)

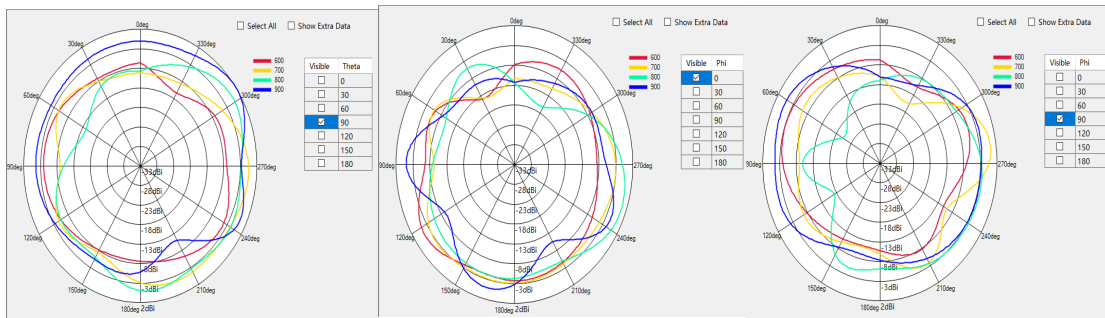


2D Radiation Pattern at 1800MHz (Mounted on metallic surfaces)

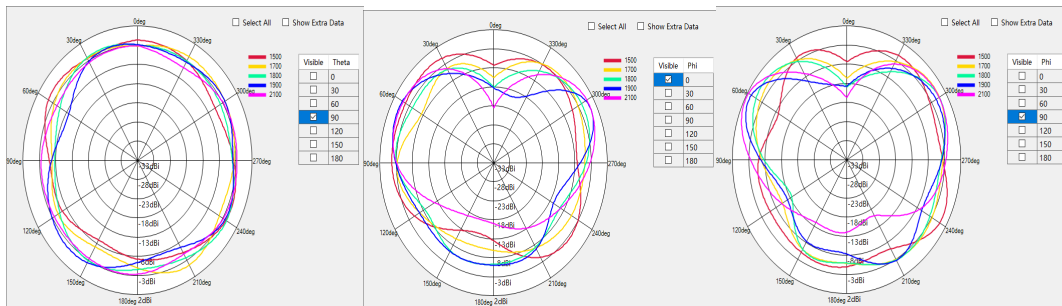


2D Radiation Pattern at 2500MHz (Mounted on metallic surfaces)

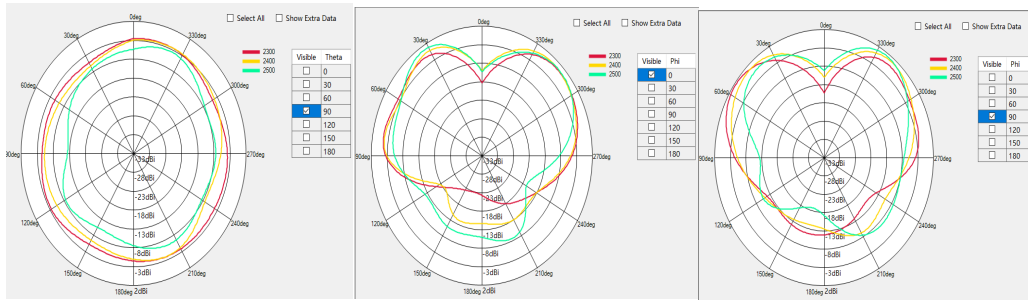


3D Radiation Pattern at 800MHz (Mounted on non-metallic surfaces)

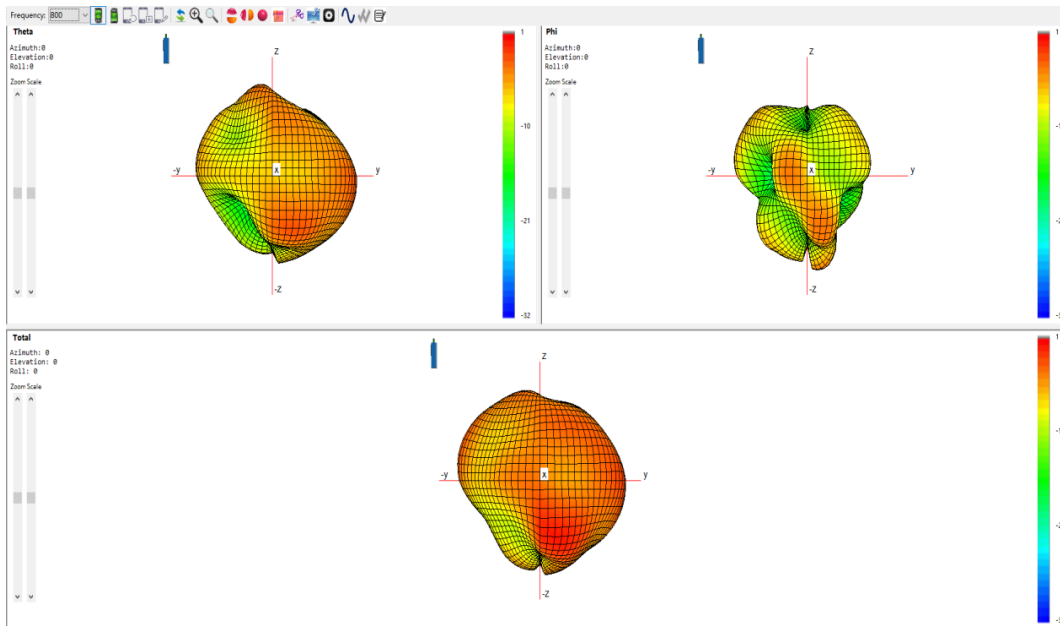


3D Radiation Pattern at 1800MHz (Mounted on non-metallic surfaces)

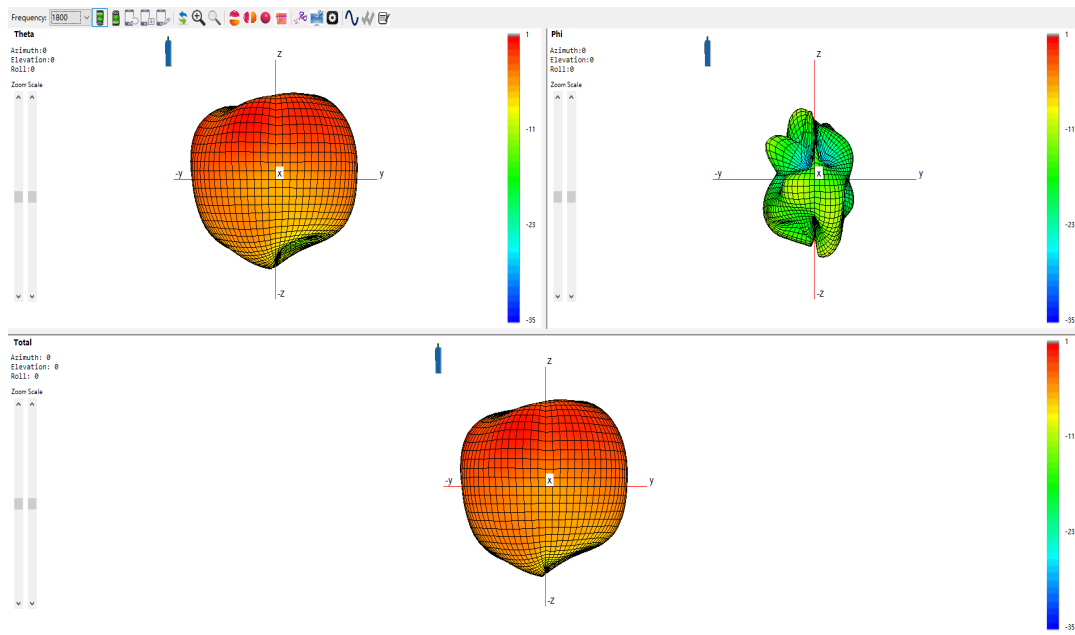


3D Radiation Pattern at 2500MHz (Mounted on non-metallic surfaces)

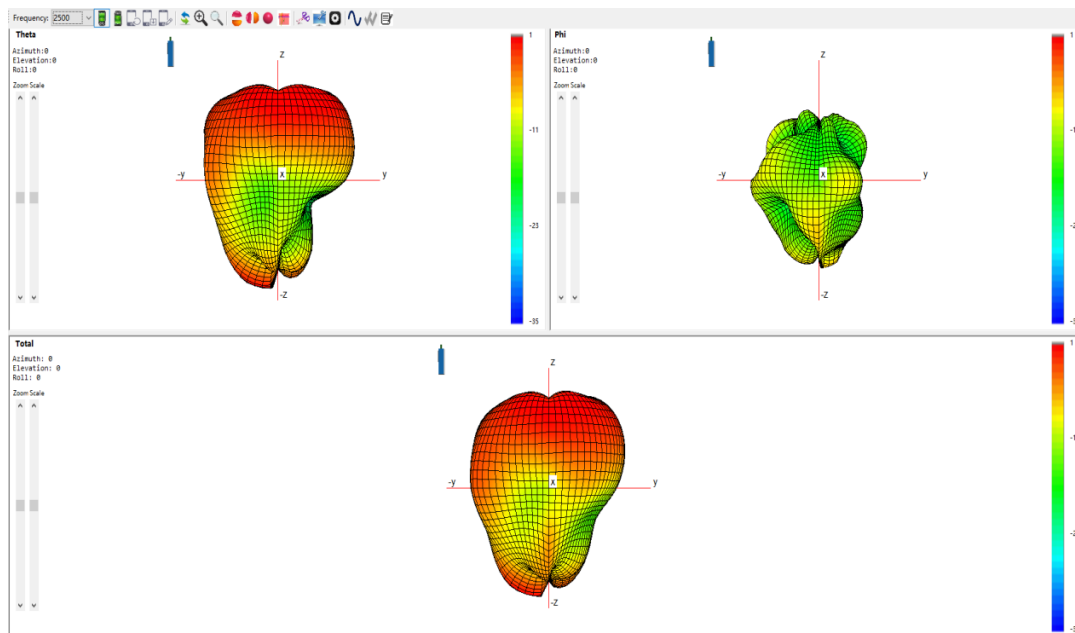


3D Radiation Pattern at 800MHz (Mounted on metallic surfaces)

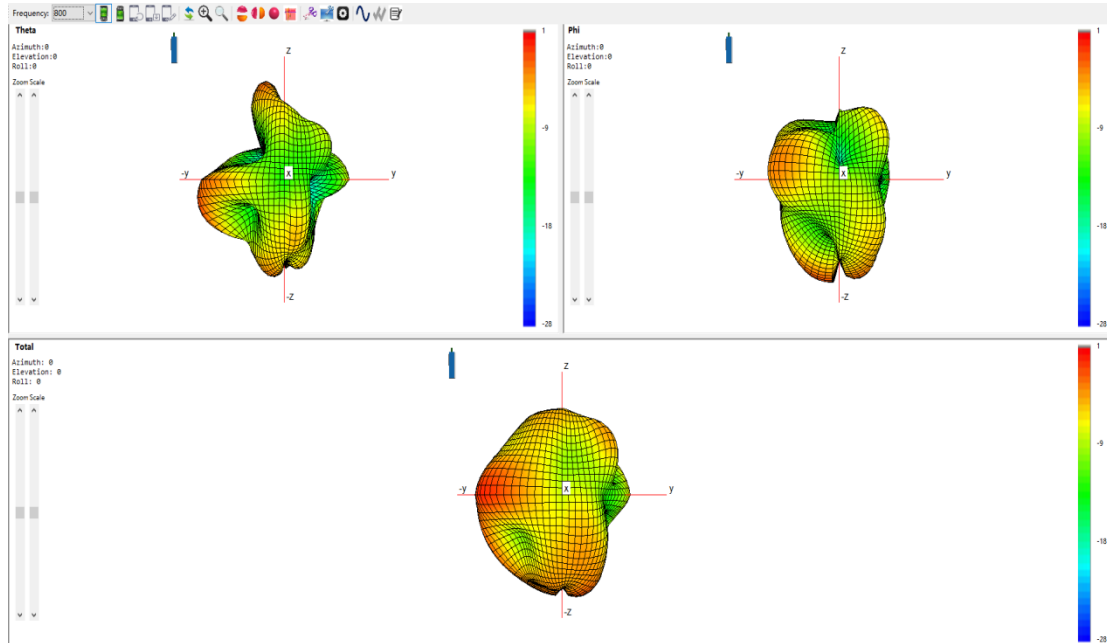

2D Radiation Pattern at 1800MHz (Mounted on metallic surfaces)

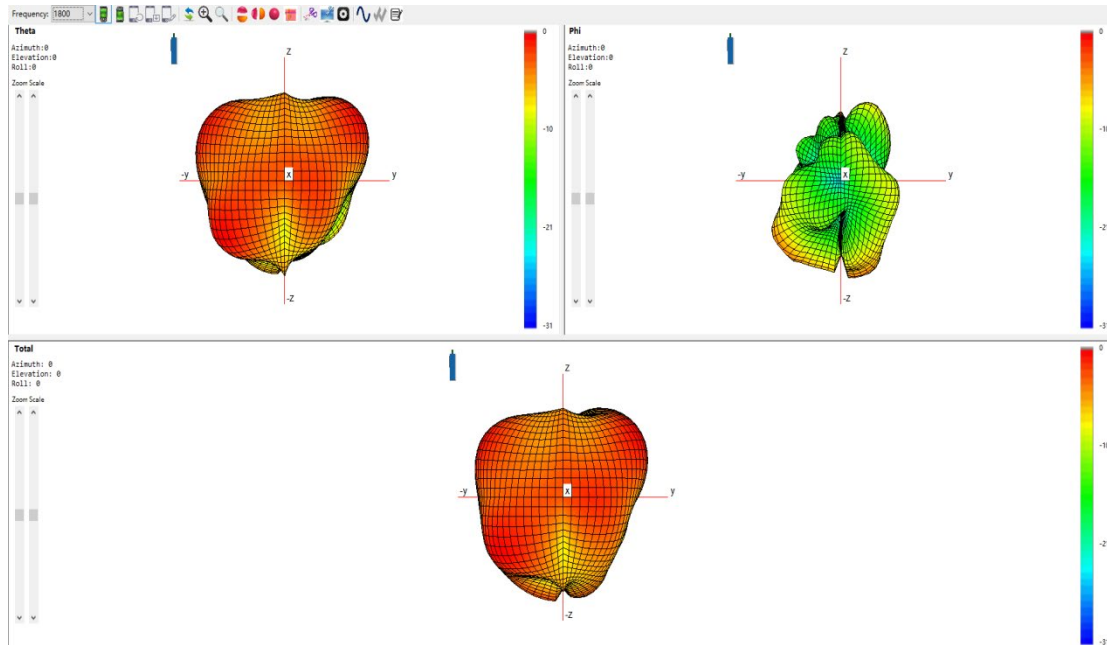

2D Radiation Pattern at 2500MHz (Mounted on metallic surfaces)

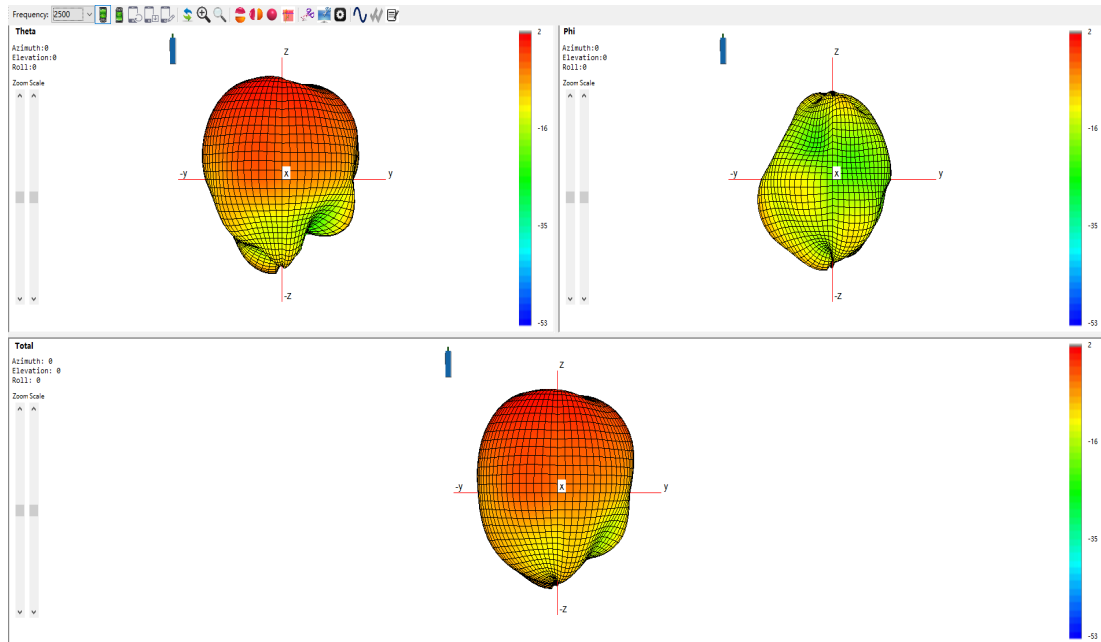

HOUSING CONFIGURATIONS

